


# IRONER

## TFI 8030

---

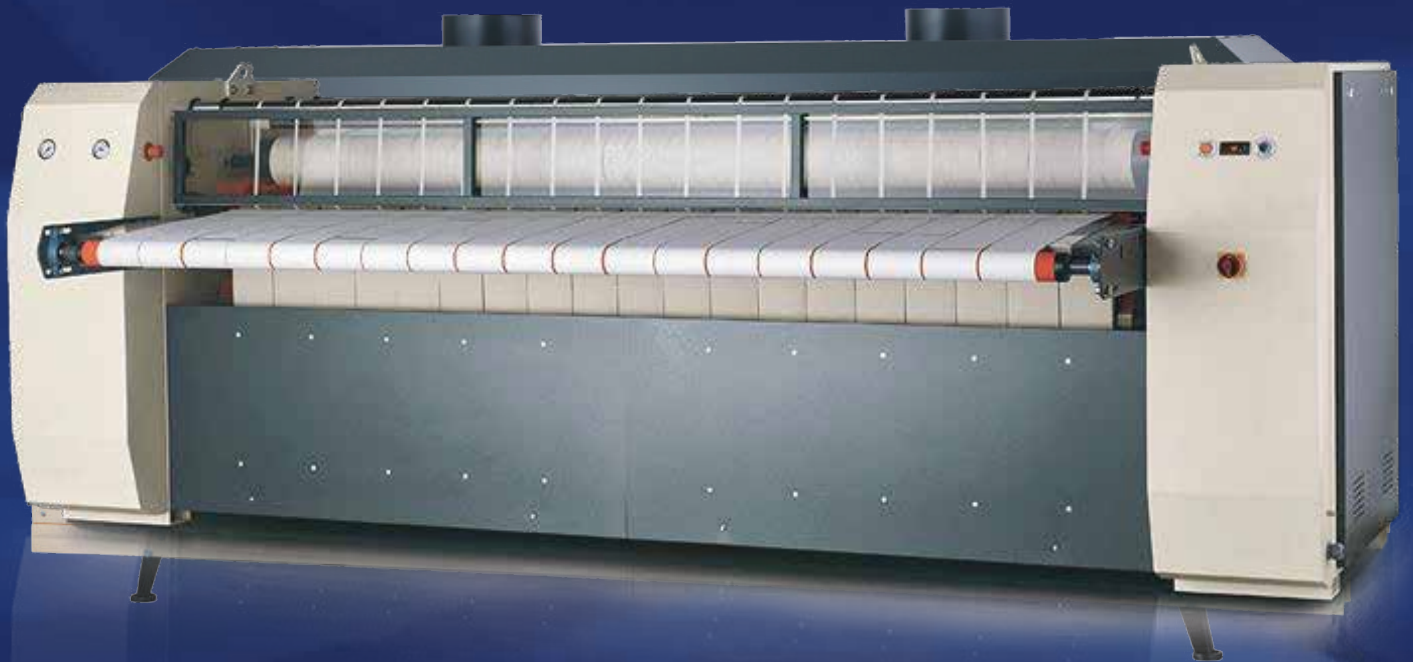

### STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Steam or electric heating
- Extended heat transfer path
- Large surface contact with linen ( 330°)
- Finger protection panel and emergency button for more safety
- Easy to use manual controller
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse working possibility to take stucked linen
- Possibility for Integration with folding machines

HENSON

LAUNDRY

# IRONER

## TFI 8030

| MODEL                              | UNIT                 | TFI 8030   |
|------------------------------------|----------------------|--|
| Roll diameter                      | mm                   | 800  |
| Working width                      | mm                   | 3000   |
| Roll speed                         | m/min.               | 4-9  |
| Performance                        | kg/h                 | 150-180  |
| <b>HEATING</b>                     |                      |  |
| Electric                           |                      |  |
| Electric heating power *           | kW                   | 36   |
| Steam                              |                      |  |
| Evaporation                        | l/h                  | 62   |
| Steam connection Ø                 | DN                   | 40 (1 ½")  |
| Steam condensate Ø                 | DN                   | 20 (¾")  |
| Steam Pressure                     | mbar                 | 400-600  |
| Steam Consumption                  | m <sup>3</sup> /h    | 200  |
| <b>VOLTAGE/ELECTRIC CONNECTION</b> |                      |  |
| Electric                           | 3ph 50Hz<br>3ph 60Hz | 200/208/220/240/380/400/415/440/480 V<br>200/208/220/240/380/400/415/440/480 V |
| Steam                              | 1ph 50Hz<br>1ph 60Hz | 200/208/220/240 V<br>200/208/220/240 V   |
| <b>MOTOR</b>                       |                      |  |
| Roll motor                         | kW                   | 1,5  |
| <b>DIMENSIONS (WxDxH)</b>          |                      |  |
| Standard                           | mm                   | 4200x1630x1350   |
| Packed                             | mm                   | 4250x1730x1450   |
| <b>WEIGHT</b>                      |                      |  |
| Net                                | kg                   | 2360   |
| Gross                              | kg                   | 2460   |
| <b>SOUND LEVEL</b>                 |                      |  |
|                                    | db(A)                | < 60   |

\*Output calculated at 380V/IIIphase.